


SD-589 (19 Function)

Functions

- SPD Current Speed
- ODO Odometer (0~99999km/m)
- DST Trip Distance
- MXS Maximum Speed
- AVS Average Speed
- TM Elapsed Time
- CLK Clock (12H/24H)
- TMP Temperature / (-10°C~70°C)
- SCAN
- "±" "M" Comparator
- SETTING TYRE CIRCUMFERENCE / (0mm~9999mm)
- SETTING SPEED SCALE (km,m)
- MAINTENANCE ALERT
- SETTING THE LAST VALUE OF ODOMETER / ODO
- COMPUTER LOW BATTERY INDICATOR
- WIRELESS WAKE UP
- AUTO BACKLIGHT
- BACKLIGHT IS LONG BRIGHT
- AUTO ON/OFF


Button Function Description

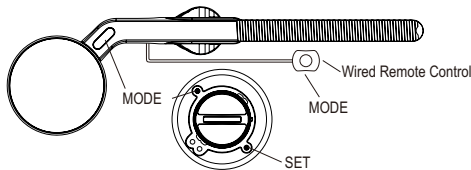

Installation



Computer Battery Installation

To install the battery, make sure the positive (+) pole faces the battery cover and then put the cover back on and tighten with a coin or flat head screw driver. If the LCD shows strange figures, take out the battery and put it back in.




Installation of Speedometer

Attach speedometer sensor to the front fork using the ties. The computer and sensor should be installed on the same side of the fork, with distance between them of less than 60cm. The arrow on the sensor should point at the magnet. Install magnet as shown in figure. Distance between sensor and magnet should be 3~5mm.




Pass bicycle spokes through the plastic hole on the bottom of the magnet and tighten to secure




Notice

The magnet is designed for spokes that are less than 2mm thick.

Mounting Shoe \ Computer

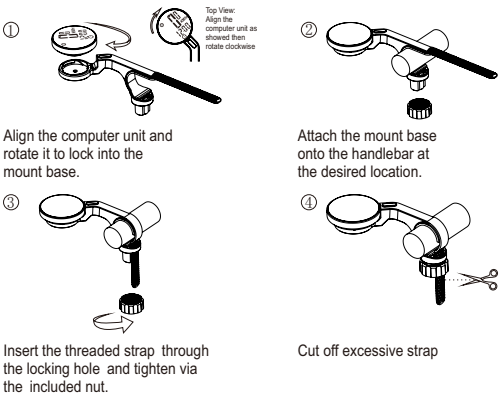

To check if the speed function and sensor alignment are working properly, spin the front wheel with the computer in speed mode. Adjust the position of sensor and magnet if there is no or weak signal.



Parameter Settings

Wheel Size Input

Reinstall the battery or press the MODE key + SET key for 4 seconds at the same time. After the screen is fully displayed, release the key, and the screen will display 2060 with 1 digit blinking. Refer to the table below to select your desired circumference, press MODE key to change the flashing value, press SET key to confirm, and move on to set the next digit. Input circumference range is 0 ~ 9999mm. Keep pressing SET key to enter kilometers/miles unit setting.




TIRE SIZE	CIRC	TIRE SIZE	CIRC	TIRE SIZE	CIRC
12x1.75	935	24x1-1/8	1795	27x1-3/8	2169
12x1.95	940	24x1-1/4	1905	27.5x1.50	2079
14x1.50	1020	26x1(599)	1913	27.5x1.95	2090
14x1.75	1055	26x1.25	1950	27.5x2.1	2148
16x1.50	1185	26x1.40	2005	27.5x1.25	2182
16x1.75	1195	26x1.50	2010	700x18C	2070
16x2.00	1245	26x1.75	2023	700x19C	2080
16x1-1/8	1290	26x1.95	2050	700x20C	2086
16x1-3/8	1300	26x2.10	2068	700x23C	2096
17x1-1/4	1340	26x2.25	2070	700x25C	2105
18x1.50	1340	26x2.35	2083	700x28C	2036
18x1.75	1350	26x3.00	2170	700x30C	2146
20x1.25	1450	26x1-1/8	1970	700x32C	2155
20x1.35	1460	26x1-3/8	2068	700Tubular	2130
20x1.50	1490	26x1-1/2	2100	700x35C	2168
20x1.75	1515	26x7/8	1920	700x38C	2180
20x1.95	1565	650x20C	1938	700x40C	2200
22x1-3/8	1770	650x23C	1944	700x42C	2204
22x1-1/2	1785	650x25C	1952	700x44C	2235
24x1.75	1890	650x38A	2125	700x45C	2242
24x2.00	1925	650x38B	2105	700x47C	2268
24x2.125	1965	27x1(630)	2145	29x2.1	2288
24x1(520)	1753	27x1-1/8	2155	29x2.2	2298
24x3/34Tubular	1785	27x1-1/4	2161	29x2.3	2326

Setting(km)/(mile)

Press the **MODE** button to choose between km (kilometer) or m (mile). Press the **SET** button to enter MAINTENANCE ALERT setting.



Setting Maintenance alert

To set the maintenance alert, press the **MODE** button to choose from 200/400/600/800 km/mile while the default value of 200km/mile flashes. Press the **SET** button to confirm and go to Clock mode. (When the **ODO** reaches the maintenance alert value you set,  symbol will show up on the screen to remind you. Press both **SET** button and **MODE** button to clear it.)



CLK Mode(12H/24H)

To enter setting in the clock mode, press and hold **SET** button for 4 seconds to enter 12/24H format setting. Press it again to switch formats. Press **SET** button to set Hour, and press **MODE** button to change the flashing hour figure. Press **SET** button one more time to set Minute, and press **MODE** button to change the flashing minute figure. Press **SET** button to confirm and press it once more to go back to **ODO** mode.



Setting the Last value of Odometer

To set the **ODO** value, press and hold **SET** button for 4 seconds in **ODO** mode. The default value is 0000.0. Press **MODE** button to change the flashing figure, and **SET** button to confirm and move on to the next figure. **NOTE:** Before replacing the battery, write down your mileage and then reenter it after the battery is replaced.



Temperature Unit Setting

Press and hold **SET** key for 4 seconds in temperature display mode to switch to Fahrenheit (°F). The temperature unit defaults to Celsius (°C).

Clear Data

In DST \ MXS \ AVS \ TM \ SCAN mode, hold **SET** button 4 seconds DST \ MXS \ AVS \ TM to clear all data.

Deep Sleep Setting

Press and hold **MODE** key + **SET** key for 6 seconds, after the screen displays **SLEEP**, computer will enter deep sleep mode. The computer unit will automatically enter deep sleep mode if there is no operation within 7 days.

Function Descriptions

Speedometer

The speed is always displayed on the screen, with a maximum reading of 99.9km/h(mile/h) and an accuracy of +/- 0.1 km/h (mile/h).

Speed Comparator

During riding, '▲' and '▼' indicates the current speed is higher or lower than the average speed (**AVS**).

Odometer

The odometer shows the total mileage from the last reset to the present, The total mileage counting range is 0 ~ 99999KM(Mile), It will automatically reset to 0 after exceeding.

Press the **MODE** button to enter **DST** mode.



Trip Distance (DST)

This is the single trip mode. Shows the distance from the last data reset.

Counting range: 0.01 ~ 9999KM/M. It will automatically reset to 0 after exceeding.

Press the **MODE** button to enter **MXS** mode.



Maximum Speed (MXS)

Max speed in a single trip (DST)

Press the **MODE** button to enter **AVS** mode.



Average Speed (AVS)

Average speed in a single trip (DST)

Press the **MODE** button to enter **TM** mode.



Trip Time

The cumulative riding time for a single trip (DST).

Timing range: 0:00:00~9:59:59, it will reset to zero and recount after exceeding.

Press the **MODE** button to enter **TMP** Mode.



Temperature (TMP)

measures and displays the external environment temperature, which defaults to Celsius (°C), with a temperature measurement range of -10°C~70°C. Press the **MODE** button to enter **SCAN** Mode.



Scan

It displays DST, MXS, AVS, and TM in

turn for four seconds per mode.

Press the **MODE** button to enter **CLOCK** Mode.



Sleep Mode

CLK clock is retained. When there is a signal input or key press computer will return to the mode before sleep, and remember the values before sleep.

Deep Sleep Mode

The screen displays **SLEEP**. In deep sleep mode, the only way to wake up the computer is to press any key.

Auto Backlight

The Smart Backlight will activate when there is insufficient light. Press any button to turn on the Backlight for 5 seconds.

Backlight long Bright

Press and hold the mode key for 4 seconds to turn on Backlight long Bright. Press and hold the mode key for 4 seconds and the Backlight long Bright will turn off. After the computer enters the sleep mode the Backlight long Bright is turned off.

Malfunctions and Problems

Malfunction	Problems
No speed reading	Incorrect magnet / sensor alignment.
Inaccurate value is indicated	Improper input, such as wheel circumference.
Slow display response	Temperature exceeds operating limits (0°C~55°C).
Black display	Temperature too high, or placed in direct sunlight for too long. Let the unit cool down.
Weak display	Poor battery contact or dead battery.
Display shows irregular figures	Take out battery and re-install after 10 seconds.

Accessories

